



# Cisco

## 642-188 Exam

### Implementing Cisco TelePresence Installations(ITI)

Thank you for Downloading 642-188 exam PDF Demo

You can Buy Latest 642-188 Full Version Download

<https://www.certkillers.net/Exam/642-188>

<https://www.certkillers.net>

---

**Question: 1**

---

After connecting to a codec via WebGUI, you are prompted for a username and password. Which username password combination is used on the codec by default?

- A. Cisco, Cisco
- B. admin, Cisco
- C. Cisco, Cisco
- D. admin, cisco

---

**Answer: B**

---

---

**Question: 2**

---

Which statement is correct when discussing the Cisco TelePresence System 1300?

- A. The system is designed to support meetings of six to eight participants
- B. The system features three 65-inch screens, three cameras, microphones, and speakers
- C. Voice-enabled switching is performed by the codec to select the active speaker in the room and capture the video for the remote side
- D. The power and Ethernet outlets must be positioned directly behind the unit

---

**Answer: C**

---

---

**Question: 3**

---

When using Auto-Collaborate, what two actions need to be done to display the laptop content after connecting the cable? (Choose two.)

- A. Press the Auto-Collaborate softkey
- B. Initiate Auto-Collaborate on the codec's GUI
- C. Set the laptop resolution to 1024x768
- D. Set your laptop resolution to 1024x720
- E. Use function key on the laptop to send signal to external display

---

**Answer: C,E**

---

---

**Question: 4**

---

During your RRA assessment of a potential Cisco TelePresence System 1300 room you notice:

- The HVAC diffuser has noticeable noise (measured at 48 dB) which sounds like rushing air. What three recommendations should be made to the customer? (Choose three.)

- A. The customer should turn the fan level down on the HVAC system to insure the fan noise is minimized in the Cisco TelePresence room

- B. The customer should contact an HVAC specialist to review and recommend an appropriate solution
- C. The customer should not worry about the HVAC fan noise because the Cisco TelePresence System uses a noise suppression algorithm designed to identify HVAC fan noise and minimize those frequencies
- D. The customer should replace the diffusers with a diffuser that is rated with a noise criterion of 10 or greater
- E. The customer should replace the ducting directly above the room with acoustically treated ducting to remove the sound of rushing airflow

---

**Answer: B,D,E**

---

---

**Question: 5**

---

In the Cisco TelePresence administration WebGUI, the camera Auto Adjust can be used to check which setting?

- A. life size
- B. zoom and focus
- C. white color balance
- D. HDMI input threshold

---

**Answer: C**

---

---

**Question: 6**

---

What is the leveling process for the Cisco TelePresence System 1000 frame?

- A. With only one display, there is no need to level the frame before attaching it to the wall
- B. Attach the frame to the wall and level the frame by raising or lowering the feet.
- C. Place a level on the middle and upper crossbars and adjust the feet as necessary to ensure that the frame is horizontally level
- D. Place a level on the side of the frame and adjust the feet as necessary to ensure that the frame is vertically level

---

**Answer: C**


---

---

**Question: 7**

---

Refer to the exhibit.

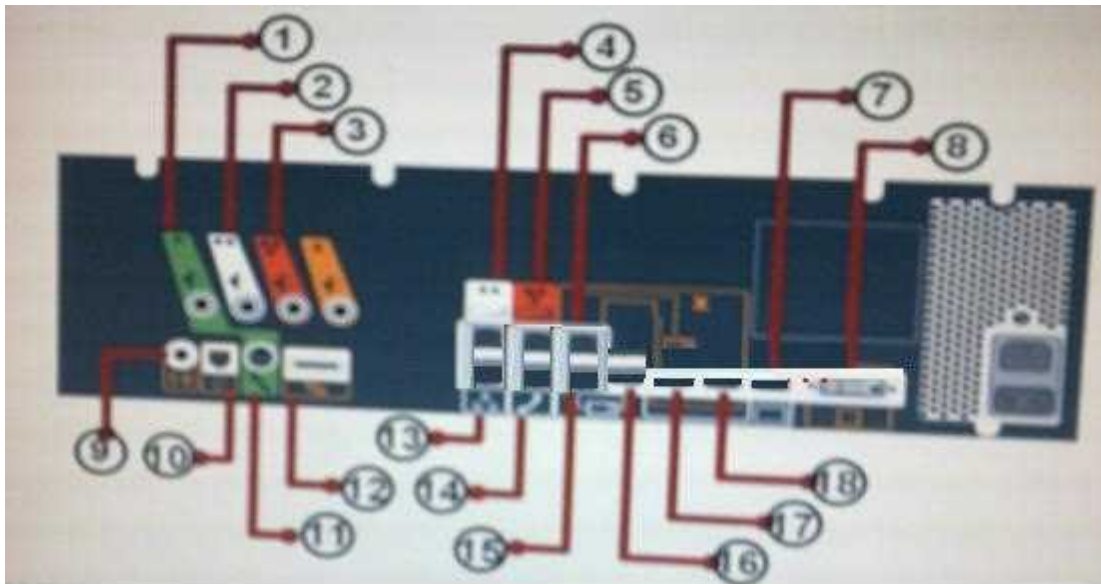

Identify the port number where the Audio Video expansion box should connect.

- A. 4
- B. 5
- C. 6
- D. 7
- E. 9
- F. 10
- G. 11
- H. 12
- I. 13

---

**Answer: H**

---



---

**Question: 8**

---

Which statement is correct when tuning the cameras by using the WebGUI of the Cisco TelePresence codec?

- A. If there is a noticeable flicker on the screen, the 50 Hz Flicker Reduction button will eliminate the flicker and increase the image resolution.
- B. If the user is 4 to 5 feet (1.2 to 1.5 m) away from the display, click the 4 feet radio button for the Focus Distance radio choice. If the user is farther than 5 feet (1.5 m) away, click the 6 feet choice.
- C. If the room uses outside lighting, click the Disable radio button for the Camera Auto Brightness and Camera Auto Color Balance choices.
- D. Auto Color Balance can produce the best results when the colors of the walls in your room are white or gray.

---

**Answer: B**

---



---

**Question: 9**

---

Which three statements are correct when tuning the camera on a Cisco TelePresence CTS-1xxx system? (Choose three.)

- A. Target placement should match the green and red boxes on the screen, respectively
- B. Place the large target three feet behind the small target.
- C. Place the large target five feet behind the small target
- D. Tune the camera so that the red and green bars line up as closely as possible
- E. Perform auto-adjust to optimize focus and sharpness

---

**Answer: A,C,D**

---

---

**Question: 10**

---

Which two statements are correct when calibrating the Cisco Telepresence cameras? (Choose two)

- A. If the room uses fixed artificial lighting, click the Disable radio button for the Camera Auto Brightness and Camera Auto Color Balance
- B. If the Auto Adjust test to automatically adjust lighting and color balance fails, you may need to add more light
- C. If the room uses fixed artificial lighting, click the Enable- radio button for the Camera Auto Brightness and Camera Auto Color Balance
- D. If the room uses outside lighting, click the Disable radio button for the Camera Auto Brightness and Camera Auto Color Balance

---

**Answer: A,B**

---

---

**Question: 11**

---

During your assessment of a potential Cisco TelePresence System 1300 room, you notice:

- The ceiling is 8 feet (2.4 meters) high and currently illuminated with recessed parabolic light fixtures. Which lighting recommendation is the most appropriate?

- A. The Cisco Telepresence endpoint has a lighting facade which is designed to provide enough light for the participants face and torso, so no lighting changes are required
- B. The ceiling should be raised higher than 8 feet (2.4 meters) to accommodate appropriate light fixtures for use with Telepresence
- C. The existing fixtures are not ideal but are adequate for use with TelePresence
- D. The existing fixtures should be replaced with recessed indirect light fixtures
- E. No recommendation can be made until the lighting has been measured with a lux meter in the appropriate zones

---

**Answer: D**

---

---

**Question: 12**

---

Which is a design requirement for Cisco Telepresence room aesthetics?

- A. Every room should be identical.
- B. Maintain continuity in appearance among rooms
- C. Carpet patterns and textures match from room to room
- D. All rooms should be painted brown
- E. The only wall treatment should be paint

---

**Answer: B**

---

---

**Question: 13**

---

When using HFR codec in a multipoint call, what happens when an endpoint without HFR calls in?

- A. The entire call downgrades the data channel to 5 fps
- B. The entire call downgrades the data channel to 5 fps but when the endpoint without HFR codec drops, it automatically increases the data channel to 30 fps
- C. The endpoint without the HFR shares data at 5 fps and all the other endpoints share at 30 fps
- D. The call drops since there are different frame rates

---

**Answer: A**

---

---

**Question: 14**

---

Which option on the Cisco Telepresence System administration WebGUI allows selecting table type?

- A. Troubleshooting --> Hardware Setup --> Display
- B. Troubleshooting --> Hardware Setup -> Configuration
- C. Troubleshooting -> Hardware Setup --> Camera
- D. Troubleshooting -> Hardware Setup -> Other Devices

---

**Answer: B**

---

---

**Question: 15**

---

The Cisco TelePresence System 1100 and Cisco TelePresence System 1300 mounting brackets has limited side-to-side adjustability. What is the first thing to consider before you mount the bracket?

- A. Attach the sliders on the bracket to the wall.
- B. Level the bracket.
- C. Verify with the customer where the conference table will be located, find the center of the conference table, and then find the corresponding point on the mounting wall.
- D. Measure the correct width between the drill holes of the mounting bracket.

---

**Answer: C**

---

CertKillers.net

## Thank You for trying 642-188 PDF Demo

To Buy Latest 642-188 Full Version Download visit link below

<https://www.certkillers.net/Exam/642-188>

## Start Your 642-188 Preparation

**[Limited Time Offer]** Use Coupon “CKNET” for Further discount on your purchase. Test your 642-188 preparation with actual exam questions.

<https://www.certkillers.net>