

Cisco

300-115 Exam

Cisco Implementing Cisco IP Switched Networks Exam

Thank you for Downloading 300-115 exam PDF Demo

You can Buy Latest 300-115 Full Version Download


https://www.certkillers.net/Exam/300-115

Version: 43.0


Question: 1

DRAG DROP

Drag and drop the StackWise states from the left onto the correct descriptions on the right.

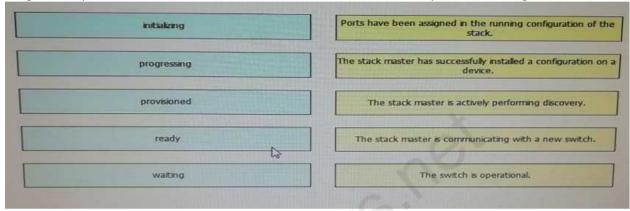

Answer:

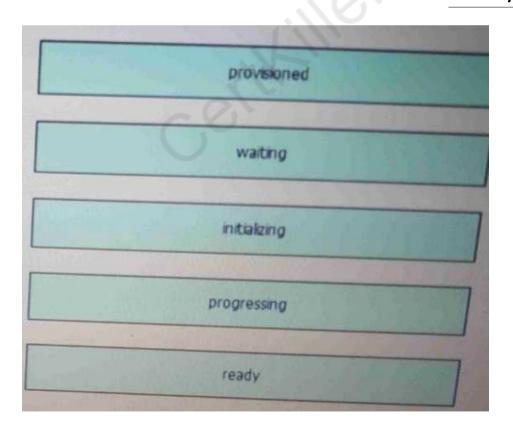

Question: 2	
Which two VLAN ranges can you add. modify or delete on a switch'? (Ch	noose two)
A. 1 through 1001	
B. 1006 through 4094	
C. 1005 through 4094	
D. 2 through 1001	
E. 2 through 4094	
	Answer: BD
Question: 3	
Which Cisco technology provides network redundancy by combin	ing two physically separate
switches to a single logical switch'?	
A. VSS	
B. IPPS	
C. PAGP	
D. LACP	
	Answer: A
Question: 4	
Which two commands configure RSPAN to capture incoming and interface? (Choose two)	outgoing traffic on a single
A manitar session 1 source interface gigabitathernati/0/2 ty	
A. monitor session 1 source interface gigabitethernetl/0/2 tx	
B. monitor session 1 destination remote vlan 910	
C. monitor session 1 dostination interface gigabitethernetl/0/1 rx	
D. monitor session 1 destination interface gigabitethernetl/0/2 rx E. monitor session 1 source interface gigabitethernet1/0/2 both	
L. Monitor session I source interface gigabitethemeti/0/2 both	
	Answer: BE
Question: 5	
Which feature is enabled automatically when you configure HSRP on an	interface?

Which feature is enabled automatically when you configure HSRP on an interface?

- A. ICMP redirect messages
- B. HSRP tracking
- C. IGMP snooping
- D. HSRP preemption

	Answer: A
Question: 6	
Question: 0	
Which command do you enter to troubleshoot a misconfigured EtherCh	annel?
 A. CORE-SW(config)#spanning-tree etherchannel guard misconfig. B. CORE-SW(config-if)#spanning-tree guard root C. CORE-SW(config-if)#spanning-tree loopguard default D. CORE-SW(config-if)#spanning-tree etherchannel guard misconfig 	
	Answer: A
Question: 7	
Which statement about configuring an RSPAN session is true?	
A. RSPAN supports, by default, the monitoring of Layer 2 switch protoco B. The same RSPAN VLAN is used for a RSPAN session on all the switches C. Only the source switch in a session must support RSPAN D. At least one access port must be configured in the RSPAN VLAN	
	Answer: B
Question: 8	
Which command maximizes system resources for ACLs?	
A. sdm prefer default B. sdm prefer routing C. sdm prefer access D. sdm prefer vlan	
	Answer: C
Question: 9	
Which option is a benefit of configuring UDLD on a link between two sw	ritches?
A. UDLD removes switching loops.B. UDLD helps prevent switching loopsC. UDLD provides a backup mechanism for fiber.D. UDLD determines the best switching path	
	Answer: B

_	- •			
Que	ctio	n·	10	
U ue	:วนบ	и.	ΤU	

Which two tasks must you perform to configure DHCP snooping on a device? (choose two)

- A. Enable DHCP snooping on the VLAN
- B. Enable VRF support for the DHCP relay agent
- C. Enable DHCP snooping globally
- D. Enable DHCP packet validation on the device.
- E. Enable DHCP option 82.

Answer: AC

Thank You for trying 300-115 PDF Demo

To Buy Latest 300-115 Full Version Download visit link below

https://www.certkillers.net/Exam/300-115

Start Your 300-115 Preparation

[Limited Time Offer] Use Coupon "CKNET" for Further discount on your purchase. Test your 300-115 preparation with actual exam questions.