

Dell EMC

DES-1721 Exam

Dell EMC Specialist - Implementation Engineer SC Series Exam

Thank you for Downloading DES-1721 exam PDF Demo

You can Buy Latest DES-1721 Full Version Download

https://www.certkillers.net/Exam/DES-1721

Version: 12.0

Question: 1


You are installing a new SC9000. Which procedure should be used to install and configure the system?


- A. Connect through the iDRAC port
- B. Connect through a null modem cable to the serial port
- C. Connect through the Dell Storage Manager Client
- D. Connect through the supplied proprietary serial cable to the serial port


Answer: D

Question: 2

Based on SAS back-end cabling best practices, which configuration represents how an SC4020 storage array with one SC220 expansion enclosure is cabled?

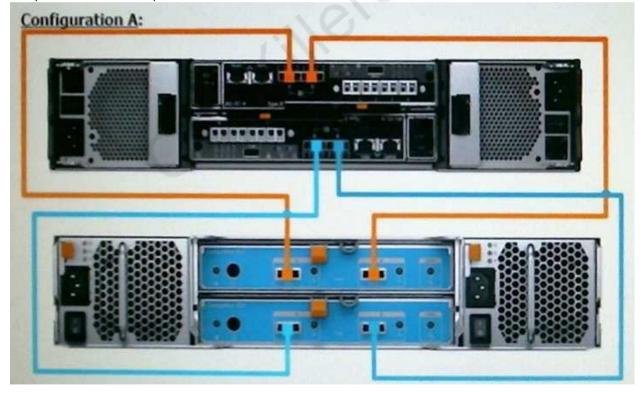

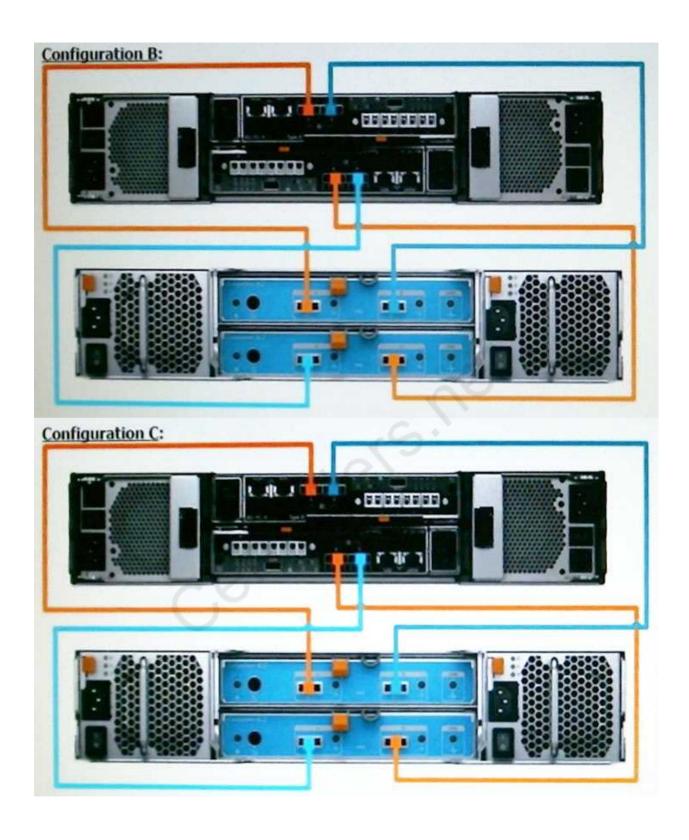

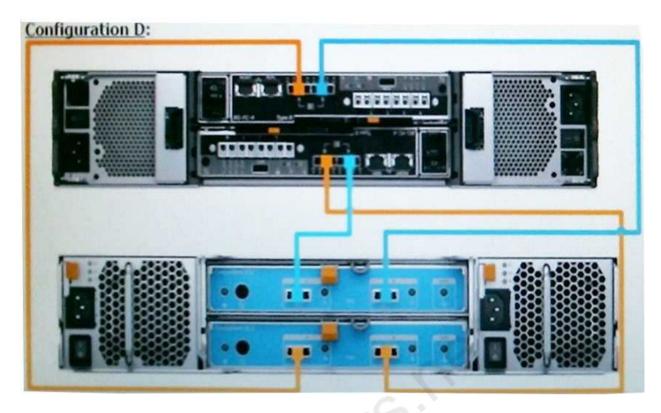

- A. Configuration A
- B. Configuration B
- C. Configuration C
- D. Configuration D

Answer: A

Question: 3

An administrator wants to configure an SC Series array to use Virtual Port Mode. What is a requirement to accomplish this task?

- A. NPIV must be disabled on Fibre Channel switches
- B. I/O Controller cards must use a single-ID firmware version
- C. Fibre Channel switches must use a switched fabric topology
- D. Activation license must be purchased and installed

Answer: D

Question: 4

What are the possible methods to upgrade the firmware on a Brocade switch?

Answer: C

A. FTP, SFTP, and Web Tools B. USB, FTP, and SFTP C. USB, FTP, and Web Tools D. USB, SFTP, and Web Tools Answer: C **Question: 5** A customer is running the Dell Storage Manager (DSM) Suite as a software stack on Microsoft Windows. To reduce the Microsoft licensing costs, the customer wants to switch to the DSM Virtual Appliance. Which recommended deployment should the customer use? A. Configure as a Primary Data Collector B. Configure as a Remote Data Collector C. Migrate the DSM database manually D. Migrate from the existing Data Collector Answer: D Question: 6 Which operating system runs the Dell Storage Manager (DSM) as a virtual appliance? A. CentOS 7 B. Windows Server 2012 R2 C. VMware

Question: 7

D. Windows Server 2010 R2

Which best practices should be followed when using iSCSI to connect SC Series arrays and hosts for switches that incorrectly negotiate speed and duplex?

- A. Use a separate supernet or switches for iSCSI trafficGigabit full duplex hard set for all iSCSI portsEnsure switches used for iSCSI are of a blocking design
- B. Use a separate VLAN or switches for iSCSI trafficAuto-negotiate for all switchesEnsure switches used for iSCSI are of a non-blocking design
- C. Use a separate VLAN or switches for iSCSI trafficGigabit full duplex hard set for all iSCSI portsEnsure switches used for iSCSI are of a non-blocking design

| D. I | Use a separate | subnet or | switches for | iSCSI t | trafficAuto-nego | otiate fo | or all s | switchesEnsure | switches |
|------|-----------------|--------------|--------------|---------|------------------|-----------|----------|----------------|----------|
| use | d for iSCSI are | of a blockin | ng design | | | | | | |

Question: 8

DRAG DROP

What is the correct system hierarchy of SC Series array storage virtualization?

| Pagepool | STEP 1 |
|-----------------|--------|
| Pagepool Device | STEP 2 |
| Disk Folder | STEP 3 |
| RAID Extent | STEP 4 |
| Raid Device | STEP 5 |

Answer:

| Pagepool | Raid Device |
|-----------------|-----------------|
| Pagepool Device | RAID Extent |
| Disk Folder | Disk Folder |
| RAID Extent | Pagepool Device |
| Raid Device | Pagepool |

Question: 9

Assume a storage administrator is using the recommended storage profile. What describes the distribution of volume data residing in an SC series storage array that has 15K and 7K as the backend?

- A. New and frequently accessed replay data in Tier 1 RAID 5Aged replay data and inaccessible data in Tier 3 RAID 6
- B. New data in Tier 1 RAID 10Frequently accessed replay data in Tier 1 RAID 5Aged replay data and inaccessible data in Tier 3 RAID 6
- C. New data in Tier 1 RAID 10Frequently accessed replay data in Tier 2 RAID 5Aged replay data and inaccessible data in Tier 3 RAID 6
- D. New and frequently accessed replay data in Tier 1 RAID 10Aged replay data and inaccessible data in Tier 3 RAID 6

| Answer: B |
|-----------|
| |

Question: 10

A customer is facing poor performance on all synchronously replicated volumes every Thursday between 4 PM and 6 PM. All departments have checked their applications for any batch jobs; however, nothing was found. The I/O graphs do not show any anomaly and the replication links are not saturated.

What is the possible reason for this behavior?

- A. Switches used for replication are restarting
- B. QoS Bandwidth Limit is enabled in the QoS node
- C. Data Progression is consuming all disk performance
- D. Automatic report creation is impacting replication

Thank You for trying DES-1721 PDF Demo

To Buy Latest DES-1721 Full Version Download visit link below

https://www.certkillers.net/Exam/DES-1721

Start Your DES-1721 Preparation

[Limited Time Offer] Use Coupon "CKNET" for Further discount on your purchase. Test your DES-1721 preparation with actual exam questions.