

# CertKillers

Guaranteed Success with Accurate & Updated Questions.

## OMG

OMG-OCUP2-INT200

*OMG Certified UML Professional (OCUP 2) - Intermediate Level*

**Questions & Answers PDF**

**For More Information - Visit:**  
**<https://www.certkillers.net/>**

# Latest Version: 6.0

## Question: 1

What does reaching the terminating pseudostate mean?

- A. The context object of the state machine is terminated.
- B. The enclosing region is completed.
- C. The final state has been reached.
- D. A completion transition has occurred.
- E. The "do" activity of the current state has completed.

**Answer: A**

## Question: 2

What are valid ways to present a component's artifacts file, such as a jar file? (Choose two.)

- A. stereotype of class with keyword <<file>> with a solid arrow pointing to the related component
- B. stereotype of class with keyword <<archive>> with a dashed arrow pointing to the related component
- C. stereotype of a component with keyword <<archive>> with a dashed arrow pointing to the related component
- D. as a compartment of a related component
- E. stereotype of a component with keyword <<file>> with a solid arrow pointing to the related component

**Answer: B, D**

## Question: 3

How many arrows can point from a flow final node?

- A. one
- B. any number
- C. none
- D. two

**Answer: C**

## Question: 4

What is NOT a correct assertion?

- A. A model element can be extended by several stereotypes at the same time.
- B. Un-applying a profile from a model deleted stereotypes extending the model.
- C. Stereotypes extending a model element can be retracted at any time.
- D. Stereotypes extending a model element are immutable.

**Answer: D**

## Question: 5

Instances of the Communication Path class connect instances of which classes in a deployment diagram?

- A. Instance Specification and Deployment Specification
- B. Deployment Target and Deployed Artifact
- C. Node and Property
- D. Node and Signal
- E. two Nodes

**Answer: E**

## Question: 6

When either a message m or a message q is to be sent-but not both-what kind of operator for combined fragment would be used?

- A. var
- B. break
- C. opt
- D. par
- E. alt

**Answer: E**

## Question: 7

What is a combined fragment?

- A. more than one interaction combined in an interaction overview diagram
- B. an interaction occurrence covering more than one lifeline
- C. the combination of decomposed lifelines
- D. a construct with interaction operands and in interaction operator.

**Answer: D**

### Question: 8


What might a connector specify?

- A. dependencies
- B. classes
- C. associations
- D. messages
- E. links

**Answer: E**

### Question: 9

In the exhibit, how many of the arrows must provide values for the outgoing arrow to be given a value?

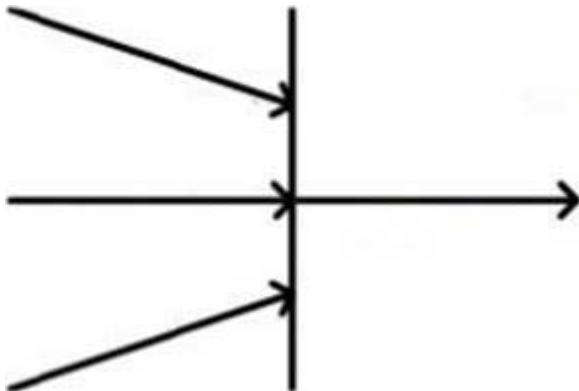

- A. none
- B. three
- C. one
- D. two

**Answer: B**

## Question: 10

What types of features may a component possess?

- A. attributes, but not operations
- B. attributes and operations
- C. neither attributes nor operations
- D. operations, but not attributes

**Answer: B**